


#4



S/N 09/887481

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant:	Posti	Examiner:	Unknown
Serial No.:	09/887481	Group Art Unit:	2631
Filed:	6/22/01	Docket No.:	930.332USW1
Title:	MULTI-FREQUENCY TRANSMITTER USING PREDISTORTION AND A METHOD OF TRANSMITTING		

**CERTIFICATE OF MAILING UNDER 37 C.F.R. §1.8**

I hereby certify that this correspondence is being deposited with the United States Postal Service with sufficient postage as first class mail in an envelope addressed to: Assistant Commissioner for Patents, Washington, DC 20231 on October 9, 2001.

Michael B. Lasky

Name

Signature

**SUBMISSION OF PRIORITY DOCUMENT**

Box Missing Parts  
Assistant Commissioner for Patents  
Washington, D.C. 20231

Dear Sir:


Enclosed is a certified copy of International application, Serial Number  
PCT/EP/08445, filed 24 December 1998, the priority of which is claimed under 35  
U.S.C. §120.


Respectfully submitted,

Altera Law Group, LLC  
6500 City West Parkway – Suite 100  
Minneapolis, MN 55344-7701  
952-912-0527

Date: October 9, 2001

By:

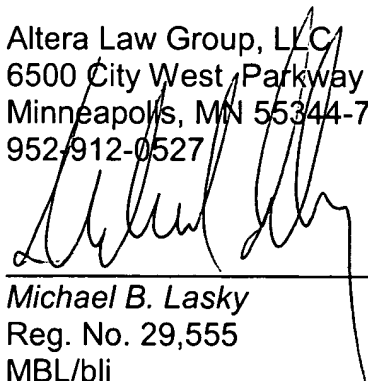  
Michael B. Lasky  
Reg. No. 29,555  
MBL/blj



### Bescheinigung

### Certificate

### Attestation

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten internationalen Patentanmeldung überein.


The attached documents are exact copies of the international patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet international spécifiée à la page suivante.

Den Haag, den  
The Hague,  
La Haye, le

18. 07. 2001

Der Präsident des Europäischen Patentamts  
Im Auftrag  
For the President of the European Patent Office  
Le Président de l'Office européen des brevets  
p. o.

  
Ulrike Staab

Patentanmeldung Nr.  
Patent application no.  
Demande de brevet n°

PCT/EP 98/08445



**Anmeldung Nr.:**  
**Application no.:** PCT/EP 98/08445  
**Demande n°:**

**Anmelder:** 1. NOKIA TELECOMMUNICATION OY - ESPOO, FINLAND  
**Applicant(s):** 2. POSTI HARRI - OULU, FINLAND  
**Demandeur(s):**

**Bezeichnung der Erfindung:**  
**Title of the invention:** A TRANSMITTER AND A METHOD OF TRANSMITTING  
**Titre de l'invention:**

**Anmeldetag:**  
**Date of filing:** 24 DECEMBER 1998 (24.12.98)  
**Date de dépôt:**

**In Anspruch genommene Priorität(en)**  
**Priority(ies) claimed**  
**Priorité(s) revendiquée(s)**

<b>Staat:</b>	<b>Tag:</b>	<b>Aktenzeichen:</b>
<b>State:</b>	<b>Date:</b>	<b>File no.</b>
<b>Pays:</b>	<b>Date:</b>	<b>Numéro de dépôt:</b>

**Benennung von Vertragsstaaten :** Siehe Formblatt PCT/RO/101 (beigefügt)  
**Designation of contracting states :** See Form PCT/RO/101 (enclosed)  
**Désignation d'états contractants :** Voir Formulaire PCT/RO/101 (ci-joint)

**Bemerkungen:**  
**Remarks:**  
**Remarques:**

## Box No.V DESIGNATION OF STATES

The following designations are hereby made under Rule 4.9(a) (mark the applicable check-boxes; at least one must be marked):

## Regional Patent

- ☒ AP ARIPO Patent: GH Ghana, GM Gambia, KE Kenya, LS Lesotho, MW Malawi, SD Sudan, SZ Swaziland, UG Uganda, ZW Zimbabwe, and any other State which is a Contracting State of the Harare Protocol and of the PCT
- ☒ EA Eurasian Patent: AM Armenia, AZ Azerbaijan, BY Belarus, KG Kyrgyzstan, KZ Kazakhstan, MD Republic of Moldova, RU Russian Federation, TJ Tajikistan, TM Turkmenistan, and any other State which is a Contracting State of the Eurasian Patent Convention and of the PCT
- ☒ EP European Patent: AT Austria, BE Belgium, CH and LI Switzerland and Liechtenstein, CY Cyprus, DE Germany, DK Denmark, ES Spain, FI Finland, FR France, GB United Kingdom, GR Greece, IE Ireland, IT Italy, LU Luxembourg, MC Monaco, NL Netherlands, PT Portugal, SE Sweden, and any other State which is a Contracting State of the European Patent Convention and of the PCT
- ☒ OA OAPI Patent: BF Burkina Faso, BJ Benin, CF Central African Republic, CG Congo, CI Côte d'Ivoire, CM Cameroon, GA Gabon, GN Guinea, ML Mali, MR Mauritania, NE Niger, SN Senegal, TD Chad, TG Togo, and any other State which is a member State of OAPI and a Contracting State of the PCT (if other kind of protection or treatment desired, specify on dotted line) GW Guinea-Bissau

## National Patent (if other kind of protection or treatment desired, specify on dotted line):

- |  |  |
|--|--|
| <input checked="" type="checkbox"/> AL Albania                               | <input checked="" type="checkbox"/> LS Lesotho                                   |
| <input checked="" type="checkbox"/> AM Armenia                               | <input checked="" type="checkbox"/> LT Lithuania                                 |
| <input checked="" type="checkbox"/> AT Austria                               | <input checked="" type="checkbox"/> LU Luxembourg                                |
| <input checked="" type="checkbox"/> AU Australia                             | <input checked="" type="checkbox"/> LV Latvia                                    |
| <input checked="" type="checkbox"/> AZ Azerbaijan                            | <input checked="" type="checkbox"/> MD Republic of Moldova                       |
| <input checked="" type="checkbox"/> BA Bosnia and Herzegovina                | <input checked="" type="checkbox"/> MG Madagascar                                |
| <input checked="" type="checkbox"/> BB Barbados                              | <input checked="" type="checkbox"/> MK The former Yugoslav Republic of Macedonia |
| <input checked="" type="checkbox"/> BG Bulgaria                              | <input checked="" type="checkbox"/> MN Mongolia                                  |
| <input checked="" type="checkbox"/> BR Brazil                                | <input checked="" type="checkbox"/> MW Malawi                                    |
| <input checked="" type="checkbox"/> BY Belarus                               | <input checked="" type="checkbox"/> MX Mexico                                    |
| <input checked="" type="checkbox"/> CA Canada                                | <input checked="" type="checkbox"/> NO Norway                                    |
| <input checked="" type="checkbox"/> CH and LI Switzerland and Liechtenstein  | <input checked="" type="checkbox"/> NZ New Zealand                               |
| <input checked="" type="checkbox"/> CN China                                 | <input checked="" type="checkbox"/> PL Poland                                    |
| <input checked="" type="checkbox"/> CU Cuba                                  | <input checked="" type="checkbox"/> PT Portugal                                  |
| <input checked="" type="checkbox"/> CZ Czech Republic                        | <input checked="" type="checkbox"/> RO Romania                                   |
| <input checked="" type="checkbox"/> DE Germany                               | <input checked="" type="checkbox"/> RU Russian Federation                        |
| <input checked="" type="checkbox"/> DK Denmark                               | <input checked="" type="checkbox"/> SD Sudan                                     |
| <input checked="" type="checkbox"/> EE Estonia                               | <input checked="" type="checkbox"/> SE Sweden                                    |
| <input checked="" type="checkbox"/> ES Spain                                 | <input checked="" type="checkbox"/> SG Singapore                                 |
| <input checked="" type="checkbox"/> FI Finland                               | <input checked="" type="checkbox"/> SI Slovenia                                  |
| <input checked="" type="checkbox"/> GB United Kingdom                        | <input checked="" type="checkbox"/> SK Slovakia                                  |
| <input checked="" type="checkbox"/> GE Georgia                               | <input checked="" type="checkbox"/> SL Sierra Leone                              |
| <input checked="" type="checkbox"/> GH Ghana                                 | <input checked="" type="checkbox"/> TJ Tajikistan                                |
| <input checked="" type="checkbox"/> GM Gambia                                | <input checked="" type="checkbox"/> TM Turkmenistan                              |
| <input checked="" type="checkbox"/> <del>GW Guinea-Bissau</del>              | <input checked="" type="checkbox"/> TR Turkey                                    |
| <input checked="" type="checkbox"/> HR Croatia                               | <input checked="" type="checkbox"/> TT Trinidad and Tobago                       |
| <input checked="" type="checkbox"/> HU Hungary                               | <input checked="" type="checkbox"/> UA Ukraine                                   |
| <input checked="" type="checkbox"/> ID Indonesia                             | <input checked="" type="checkbox"/> UG Uganda                                    |
| <input checked="" type="checkbox"/> IL Israel                                | <input checked="" type="checkbox"/> US United States of America                  |
| <input checked="" type="checkbox"/> IS Iceland                               | <input checked="" type="checkbox"/> UZ Uzbekistan                                |
| <input checked="" type="checkbox"/> JP Japan                                 | <input checked="" type="checkbox"/> VN Viet Nam                                  |
| <input checked="" type="checkbox"/> KE Kenya                                 | <input checked="" type="checkbox"/> YU Yugoslavia                                |
| <input checked="" type="checkbox"/> KG Kyrgyzstan                            | <input checked="" type="checkbox"/> ZW Zimbabwe                                  |
| <input checked="" type="checkbox"/> KP Democratic People's Republic of Korea |  |
| <input checked="" type="checkbox"/> KR Republic of Korea                     |  |
| <input checked="" type="checkbox"/> KZ Kazakhstan                            |  |
| <input checked="" type="checkbox"/> LC Saint Lucia                           |  |
| <input checked="" type="checkbox"/> LK Sri Lanka                             |  |
| <input checked="" type="checkbox"/> LR Liberia                               |  |

Check-boxes reserved for designating States (for the purposes of a national patent) which have become party to the PCT after issuance of this sheet:

- ☐ .....
- ☐ .....

**Precautionary Designation Statement:** In addition to the designations made above, the applicant also makes under Rule 4.9(b) all other designations which would be permitted under the PCT except any designation(s) indicated in the Supplemental Box as being excluded from the scope of this statement. The applicant declares that those additional designations are subject to confirmation and that any designation which is not confirmed before the expiration of 15 months from the priority date is to be regarded as withdrawn by the applicant at the expiration of that time limit. (Confirmation of a designation consists of the filing of a notice specifying that designation and the payment of the designation and confirmation fees. Confirmation must reach the receiving Office within the 15-month time limit.)

5

## A TRANSMITTER AND A METHOD OF TRANSMITTING

10

The present invention relates to a transmitter and a method of transmitting and in particular, but not exclusively, for use in a telecommunications network.

15

In known wireless telecommunication networks 2 such as illustrated in Figure 1, the area covered by the network 2 is divided into a plurality of cells 4. Each cell 4 has associated therewith a base transceiver station 6. Each base station 6 is arranged to communicate with terminals located in the cell 8 associated with that base station 6. The terminals 8 may be mobile terminals which are arranged to move between the cells 4.

20

Each base station 6 in the GSM (Global System for Mobile communications) is arranged to transmit N frequencies out of M available frequencies C1....CM, as illustrated in Figure 2a. Each of the M frequencies is different and within the bandwidth allocated for signals transmitted by base stations. Each channel is divided into a plurality of sequential frames F one of which is shown in Figure 2b. Each frame F is divided into eight slots S0..S7. The GSM standard is a time/frequency division multiple access system (F/TDMA) and accordingly signals will be transmitted by the base station to different mobile stations in different time slots. In other words, the base station will transmit signals to different mobile stations in different time slots at the same frequency. N is usually much less than M.

25

30

35

With known base transceiver stations a separate transmitter circuit is generally provided for each different frequency. For illustrative purposes a known base transceiver station is shown in Figure 3. For the purpose of clarity only the transmit part 10 of the base station 12 is shown in Figure 3.

40

The transmit part 10 comprises N different transmit paths 14, one path being provided for each frequency. For clarity only the

5 arrangement of one path 14 is shown but it should be appreciated  
that each path 14 has the same structure. Each path 14 comprises  
a modulator 16 which modulates the signal to be transmitted. The  
modulated signal is output to an amplifier 18 which amplifies the  
10 modulated signal. The output of the amplifier 18 is then filtered  
by a bandpass filter 20 which removes or attenuates unwanted  
noise and other emissions such as spurious signals and  
intermodulation products.

15 The output of each transmit path 14 is connected to the input of  
a combiner 22 which combines the signals from each path 14 to  
provide a multicarrier signal. The output of the combiner 22 is  
connected to an antenna 24 which transmits the multicarrier  
signal containing each of the N different channels to the  
terminals in the cell served by the base station.

20 It is desirable to reduce the number of transmit paths to one as  
this would significantly reduce the costs involved. However, if  
a single amplifier were to be used with a number of channels at  
the same time, that amplifier would need to be very linear to  
25 prevent the leakage of power into adjacent channels. The leakage  
of power into adjacent channels is undesirable in that a  
reduction in system capacity and/or a reduction in signal quality  
results. Linear amplifiers are known but even these amplifiers  
are not linear when operated near the peak capacity of the  
30 amplifier.

Several methods have been proposed for ensuring that amplifiers  
are linear. It is known, for example, from International Patent  
Application No. WO 97/30521 to use predistortion in a transmitter  
35 to try to ensure linearity. Predistortion is used to try to  
ensure that a transmitter is linear. Amplifiers introduce non-  
linearity. With predistortion, a signal is distorted prior to  
being input to the amplifier which causes the distortion. The  
predistortion applied is the inverse of the distortion caused by  
40 the amplifier. Thus the output of the amplifier will be linear  
with respect to the signal prior to the application of the

5 predistortion and the passing of that signal through the amplifier. The transmitter illustrated in this document is of the type where a different transmit path is provided for each channel.

10 Reference is also made to the following papers: Linearization of Multi-Carrier Power Amplifiers by Johansson, Mattsson and Faulkner (IEEE 1993); Linearisation of RF multicarrier amplifiers using Cartesian Feedback by Johansson and Sundstrom (Electronics Letters 7 July 1994); and Linearization of Wideband RF Power  
15 Amplifiers by Johansson and Faulkner. These documents disclose a transmitter which uses Cartesian feedback to correct for the non linearity of the amplifier. A signal from the output of the power amplifier is feedback and demodulated. The demodulated signal is subtracted from the input signals to provide an error  
20 signal. The error signal is used to drive the modulator and the amplifier. The feedback is performed in the analogue domain. In these documents, a separate Cartesian feedback module is provided for each channel. It should be appreciated that Cartesian feedback is by its nature a narrow band linearization technique.

25 It is an aim of embodiments of the present invention to provide a transmitter which can have only a single transmit path and which solves or at least mitigates the problems caused by a non linear amplifier.

30 According to one aspect of the present invention, there is provided a multi frequency carrier transmitter comprising input means for receiving a plurality of different digital signals to be transmitted, said different signals to be transmitted on  
35 different carrier frequencies; amplifier means for receiving a composite signal comprising said different signals at the respective carrier frequencies and amplifying said composite signal; and predistortion means for predistorting said plurality of digital signals prior to amplification of the composite signal  
40 by said amplification means, said predistortion provided by said predistortion means being subsequently altered in dependence on

5 the difference between said input signals and the output at said amplifier means.

Accordingly, embodiments of the present invention provide a multi carrier transmitter which is able to deal with the problems of  
10 nonlinearity by using predistortion. The predistortion can be implemented more simply than the feedback method discussed in the prior art.

The input means are preferably arranged to separately receive  
15 each of the different signals. Combiner means are preferably provided between the input means and the amplifier means for combining said plurality of different signals to provide a composite signal. This may be the composite signal input to the amplifier means or may be a composite signal at a lower,  
20 intermediate frequency. In the latter case, that composite signal at a lower frequency would be upconverted to provide the composite signal input to the amplifier means.

Preferably the predistortion means are arranged to individually  
25 predistort each of the different signals before the plurality of different signals are combined by said combiner. This has the advantage that it is easy to ensure that different predistortion coefficients appropriate for the respective carrier frequency are applied to each of the signals which will be at the respective  
30 different carrier frequencies.

Alternatively, the predistortion means may be arranged to predistort the composite signal after the plurality of signals have been combined by the combiner.

35 A feedback path may be arranged between the amplifying means and the predistorting means. Preferably, the predistorting means is arranged to compare the output from the amplifying means from the feedback path with the signals received by the receiving means  
40 and to provide, if necessary, at least one new predistortion value to be applied to at least one subsequent signal received



5 by the receiving means. In this way, the predistorting means can adapt to changes in the operating conditions of the amplifier means.

10 Preferably, means are provided in the feedback path for separating the output of the amplifying means into a plurality of different signals. The predistorting means is preferably arranged to compare each of the separated signals with the corresponding signals received from the input means and to determine if the at least one predistortion value needs to be  
15 altered.

Alternatively, the predistorting means is arranged to compare the composite signal from the amplifying means with a plurality of different signals to provide, if necessary, the at least one new  
20 predistortion value.

The predistortion means are preferably arranged to provide a plurality of predistortion coefficients, at least one predistortion coefficient being provided for each multi carrier  
25 frequency. Different predistortion coefficients are preferably provided for each multi carrier frequency regardless of the way in which the predistortion is achieved in practice.

Preferably, the predistortion coefficients for each multicarrier  
30 frequency take into account characteristics of other of the said multicarrier frequencies. Those characteristics can include one or more of the following: frequency; and distortion caused by the amplifier means.

35 The amplifier means is preferably a nonlinear amplifier. The predistortion means is preferably arranged to compensate for the nonlinearity of the phase and/or amplitude of the output of the amplifier.

40 A digital to analogue converter may be provided for converting the plurality of signals to analogue form before said signals are

5       amplified by said amplifier means.

The transmitter is preferably incorporated in a base station or alternatively in a mobile station.

10       According to a second aspect of the present invention, there is provided a multi carrier frequency transmission method comprising the steps of receiving a plurality of different digital signals to be transmitted, said different signals to be transmitted on different carrier frequencies; combining said plurality of  
15       different signals to provide a composite signal comprising the different signals at the respective carrier frequencies; and amplifying said composite signal, wherein the method further comprises the steps of: predistorting the plurality of different digital signals prior to amplification of the composite signal  
20       by the amplification means; and altering the predistortion applied to subsequent signals in dependence on the difference between said different signals and the amplified signal.

For a better understanding of the present invention and as to how  
25       the same may be carried into effect, reference will now be made by way of example to the accompanying drawings in which:  
Figure 1 shows a typical wireless telecommunications network;  
Figure 2a shows the M available frequencies for transmitting to terminals by base stations;  
30       Figure 2b shows the structure of a frame;  
Figure 3 shows the transmit part of a known base station;  
Figure 4 shows the transmit part of a first base station embodying the present invention;  
Figure 5 shows the transmit part of a second base station  
35       embodying the present invention;  
Figure 6 shows the transmit part of a third base station embodying the present invention;  
Figure 7 shows a predistorter, which can be used in the first and second embodiments, in more detail;  
40       Figure 8 shows a second predistorter, which can be used in the first and second embodiments, in more detail;

5 Figure 9 shows a third predistorter which can be used in the  
third embodiments, in more detail; and  
Figure 10 shows a channelizer.

10 Reference will now be made to Figure 4 which shows a first  
embodiment of the present invention. In particular, the transmit  
part 102 of the base station 100 is shown. The base station 100  
is in a cellular system of the type shown in Figure 1.

15 The transmit part 102 of the base station 100 comprises N channel  
encoders 104 where N is the number of different frequencies on  
which the base station 100 will transmit signals. Each channel  
encoder 104 receives the data to be transmitted on the particular  
frequency associated with the given channel encoder 104. The data  
is placed in a suitable form for transmission. This may include  
20 digitising the data, encoding the data, interleaving the data  
and/or any other step required to be carried out. As mentioned  
hereinbefore, each channel is on a different frequency after the  
modulator. The signals output by the channel encoders 104 are in  
digital form and are at a baseband frequency. Coding,  
25 interleaving etc is performed on the digital baseband signals.

The output of each channel encoder 104 is input to a respective  
digital modulator 106. Each digital modulator 106 also receives  
two outputs from the adaptive predistorter 108. The first output  
30 from the predistorter 108 provides one or more amplitude  
coefficients which are used to predistort the signal which is  
output by the digital modulator to compensate for the non  
linearity of an amplifier 122 with respect to amplitude. The  
second output from the predistorter 108 provides one or more  
35 phase coefficients which are used to predistort the signal which  
is output by the modulator 106 to compensate for phase distortion  
provided by the amplifier 122. The amplifier 122 will be  
described in more detail hereinafter.

40 The digital modulators 106 are arranged to modulate the output  
of the respective channel encoders 104 according to the  
modulation method use by the telecommunications system of which

5 the base station 100 forms a part. In the case of the GSM standard the modulators 106 will perform Gaussian minimum shift keying (GMSK). In general terms the modulators 106 take the baseband input from the respective channel encoder 104, pass that  
10 input through a shaping filter and mix the signal with a carrier signal at an intermediate frequency which is higher than the baseband frequency but less than the frequency at which the signals are transmitted to thereby provide a modulated output. The predistortion to compensate for the phase and amplitude distortion introduced by the amplifier 122 can take place at the  
15 same time. The predistortion can be performed during or more preferably after the modulation has been carried out by the modulator 106.

The output of each of the digital modulators 106 are input to a  
20 signal combiner 11 and to the adaptive predistortor 108. The combiner 110 combines the outputs of all of the modulators 106 to provide a single output. That output contains the signals for each of the frequencies. It should be appreciated that the output of the combiner 110 provides a single stream of digital words  
25 which represent the amplitude of the composite signal at each sampling instant. The output of the combiner 110 is input to a digital to analogue converter 112 which converts the digital wideband signal output by the combiner to an analogue signal.

30 The output of the digital to analogue converter 112 is input to a first bandpass filter 114 which removes signal components generated by the digital to analogue converter 112 which are outside the intermediate frequency band. The output of the first bandpass filter 114 is input to a first mixer 116. The first  
35 mixer 116 also receives an input from a first local oscillator 118. The output of the first bandpass filter 114 is thus mixed by the first mixer 116 with the output of the first local oscillator 118 to provide an output containing the N signals, each of which is at the radio frequency at which that signal is  
40 to be transmitted. Each of the N signals will thus be at a different radio frequency. The frequency of the first local

5 oscillator 118 is thus selected to allow the intermediate frequency signals to be upconverted to the required radio frequencies by the first mixer 116.

10 The output of the first mixer 116 is input to a second bandpass filter 120 which removes any signal components introduced by the first mixer 116 which are outside the radio frequency band of the signals to be transmitted.

15 The output of the second bandpass filter 120 is input to the power amplifier 122 which amplifies the received input. The output of the amplifier 122 is input to a third bandpass filter 124 which is arranged to filter out any signal components introduced by the amplifier 122 which fall outside the radio frequency band of the signals to be transmitted. The output of  
20 the third bandpass filter 124 is passed to an antenna 126 which transmits the signals to the terminals in the cell associated with the base station.

25 Between the amplifier 122 and the third bandpass filter 124, there is arranged a coupler 128 which is arranged to sample a small part of the signals which are transmitted. In other words, the coupler 128 allows a small proportion of the signals to be transmitted to be sampled. The coupler 128 outputs an analogue sample of the output signal which is typically below the power  
30 of the input to the third bandpass filter 124.

The output of the coupler 128 is input to a second mixer 132 which receives a signal from a second local oscillator 134. The signals which are received from the coupler 128 are in the radio frequency band. The signal from the second local oscillator 134  
35 is at a frequency such that when the signals from the coupler 128 are mixed with signal from the local oscillator 134, the output of the second mixer 132 consists of the signals which were transmitted but at the intermediate frequencies. The intermediate frequencies output by the second mixer 132 may, but not  
40 necessarily be the same as the intermediate frequencies input to

5 the first mixer 116. Accordingly, the frequency of the signals provided by the first and second oscillators 118 and 134 may be the same. In that case, a single oscillator may be provided.

10 The output of the second mixer 132 is input to a fourth bandpass filter 136 which filters out any signal components introduced by the second mixer 132 which are outside the intermediate frequency band. The output of the fourth bandpass filter 136 is input to an analogue to digital converter 138 which is arranged to convert the analogue signals to digital form.

15 The digital signals are output by the analogue to digital converter 138 to a channelizer 140. The channelizer 140 divides the signals into the N different frequencies corresponding to the frequencies on which those signals were transmitted. The  
20 channelizer 140 is able to distinguish the N signals as they are all at different frequencies. The channelizer 140 provides N outputs, one for each of the frequencies. Each of the N outputs provided by the channelizer 140 are input to the adaptive predistorter 108. The channelizer 140 can be provided in any  
25 suitable way including a bank of digital downconverters and fast fourier transform circuitry.

) The adaptive predistorter 108 thus receives for each channel a version of the signal before it passes through the combiner 110  
30 and subsequent elements of transmit part 102 of the base station 100 (from the respective digital modulator) and a version of the signal after it has passed through the transmit part 102 (from the channelizer 140). The predistorter 108 thus compares like versions of the same signal eg, both signals will be modulated  
35 at the same frequencies. The adaptive predistorter 108 is arranged to compare these signals. If the coefficients which the predistorter 108 outputs to the given digital modulator are good then the signal which is transmitted should be the same as the respective signal which is input to the combiner 110. Ideally the  
40 only differences should be in scale of the signals. If the signals differ, the predistorter 108 arranged to calculate new

5 predistortion coefficients which take into account the results of the comparison.

Thus, the predistorter 108 compares for each frequency the signal which was transmitted with the signal output by the respective  
10 digital modulator 106. For each frequency it is determined if the current predistortion coefficients are acceptable and if not calculates new coefficients to be used for that channel. Predistortion is thus performed individually for each frequency prior to signal combining. The predistortion coefficients for  
15 each frequency are determined based on feedback from the corresponding frequency as transmitted. The predistortion coefficients are arranged to compensate for non-linearity with respect to amplitude and also phase distortion. The phase and amplitude of the signals of the digital modulators 106 are  
20 altered in accordance with these coefficients. How these coefficients are used will depend on the modulation method. In the simplest cases, the coefficients could be added to the signal or used as multipliers.

25 A microcontroller 142 is provided which provides control signals to the predistorter 108, the combiner 110, the channelizer 140 and the first and second local oscillators 118 and 134. The microcontroller 142 is arranged to control the frequency of the signals generated by the oscillators 118 and 134.

30 The embodiment of Figure 4 has the advantage that each of the individual channels are input to the adaptive predistorter on the input side and the individual channels are received from a channeliser on the output side. Therefore, the predistortion  
35 coefficients that are calculated by the adaptive predistorter are based on all of the carriers. This allows optimal performance to be obtained since all the information is available.

40 The combiner 110 requires information on the frequency if an inverse fast fourier transform combining technique is required. The algorithm performed by the adaptive predistorter 108 may

5 also, as discussed hereinbefore utilise frequency information when calculating the predistortion coefficients.

Reference will now be made to Figure 7 which shows a first predistorter which can be used in the arrangement of Figure 4.

10 The predistorter 108a comprises n subtractors 202 each of which receives a respective one of the outputs from the digital modulators 106. Each subtractor also receives a input from the channeliser 140. Each subtractor 202 receives the output from the modulator 106 corresponding to a given user and the output from the channeliser 140 which also corresponds to that user. The

15 subtractor 202 subtracts one of the outputs from the other to thus determine the difference between those signals. The output of each subtractor 202 thus constitutes a difference signal which is input to an adaption algorithm block 204 which on the basis of the input received from the subtractors 202 calculates, if

20 necessary, new amplitude and phase predistortion coefficients. These amplitude and phase coefficients are output to a look-up table 200 where they are stored. The values from the look-up table 200 are supplied, as shown in Figure 4, to the respective

25 digital modulators 106. The adaption algorithm block 204 may also receive an input from the microcontroller 142 which provides information as to the frequency of the signals. This information can be used by the adaption algorithm block 204 to calculate the amplitude and phase predistortion coefficients.

30

Reference will now be made to Figure 5 which shows a second embodiment of the present invention. The embodiment shown in Figure 5 is similar to the embodiment shown in Figure 4 and accordingly only the differences between the first and second

35 embodiments will be described.

The adaptive predistorter 108 does not, as in the first embodiment, have outputs connected to the digital modulators 106. The output of the combiner 110 is connected to the input of the

40 predistorter 108. The output of the predistorter 108 is connected to the input of the digital to analogue convertor. The



5 predistorter 108 thus predistorts the multicarrier output of the combiner 110 and outputs a predistorted multicarrier signal. The feedback path is the same in the first and second embodiments and accordingly the predistorter 108 operates in a similar manner to that shown in the first embodiment. However, phase correction is not applied and the amplitude correction is the same for all frequencies. This solution is simple but may not provide the required performance in all cases.

15 Reference will now be made to Figure 8 which shows a second predistorter 108b which can be used in the second embodiment shown in Figure 5. This second predistorter 108 comprises n subtractors 208 each of which receives an output from a respective one of the digital modulators. Each subtracter 208 also receives a corresponding input from the channelizer 140 as in the first embodiment. Each subtracter 208 thus receives two modulated signals. The two signals received by each subtracter 208 are subtracted one from the other to generate a difference signal. This output difference signal is input to the adaption algorithm block 204 which is the same as discussed in relation to the first predistorter of Figure 7. As with the first predistorter of Figure 7, the adaption algorithm block 204 also receives an input from the microcontroller 142 with information concerning the frequency. The adaption algorithm block 204 provides amplitude coefficients on its output which are output to the look-up table 200. Unlike the embodiment shown in Figure 7, the look-up table receives the multicarrier signal from the combiner 110 which defines an address in the look-up table. Accordingly, the multicarrier signal is modified in accordance with the amplitude values from the look-up table and output to the digital to analogue convertor 112.

40 Reference is now made to Figure 10 which shows a possible construction of the channeliser 140. The channeliser comprises n blocks 220, with one block provided for each frequency. Each block of the channeliser 220 comprises an input for receiving the output of the analogue to digital converter 138 and a frequency

5 control signal from the microcontroller 142. The output from the  
analogue to digital converter 138 is input to first and second  
multipliers 222 and 224. The first multiplier 222 produces the  
I or in-band, component of the input signal whilst the second  
10 multiplier 224 produces the Q, or quadrature-phase component of  
the input signal. Each of the multipliers 222 and 224 receives  
a frequency from the numerically controlled oscillator 226. The  
frequency of the oscillator 226 is controlled by the frequency  
control input. The output of the oscillator 226 is connected  
15 directly to one of the multipliers 222 whilst the output for the  
second multipliers 224 is connected to a phase shifter 228 which  
shifts the phase of the output signal from the oscillator 226 by  
90°. The phase shifted output signal of the oscillator 226 is  
input to the second multipliers 224.

20 The output of each of the first and second multipliers 222 and  
224 are connected to filters 230 and 232 which are arranged to  
filter out signal components introduced by the respective  
multipliers as well as other carriers within the multicarrier  
signal.

25 Each element 220 thus provides two outputs, one for the I  
component and one for the Q component for each frequency.

30 The frequency information provided by the microcontroller 142 is  
used by the predistorter 108 in the third embodiment to  
reconstruct the composite signal using any appropriate method.  
The methods require frequency information. One example is the  
inverse fast fourier transform technique which creates a spectral  
representation of the signal sampled in the time domain.

35 Reference will now be made to Figure 6 which shows a third  
embodiment of the present invention. As with the second  
embodiment of the present invention, only the differences between  
the first and third embodiments will be discussed.

40 The channelizer 140 of Figure 4 has been omitted from the

embodiment of Figure 6. The output of the analogue to digital converter 138 is thus connected directly to the input of the predistorter 108. As information is only available on the composite signal, the predistorter is arranged to create a reference.

Reference will now be made to Figure 9 which shows a third embodiment of a predistorter which can be used in the embodiment of Figure 6. The third predistorter 108c receives the outputs from the digital modulators 106. The output of each of the digital modulators 106 is input to a combiner 212 which combines the outputs of the modulators 200 to provide a single signal which is input to a single subtracter 214. The single subtracter 214 also receives the output of the analogue to digital converter 138. The single subtracter 214 provides a difference signal as a result of subtracting one of the outputs from the combiner 212 and the analogue to digital converter 138 from the other. This difference signal is input to an adaption algorithm block 216 which calculates, if necessary new amplitude and phase distortion coefficients. As with the first two predistorters, the adaption algorithm block 216 receives an input from the microcontroller 146 with information concerning the frequency. This information is also input to the combiner 212. The new values are stored in the look-up table 200.

In the previously described embodiments, the output from the digital modulators are input to the adaptive predistorter. In an alternative embodiment, the output of the channel encoders may be output to the adaptive predistorter instead. In those circumstances, the channeliser may need also to demodulate the signals so that the adaptive predistortor compares like with like.

The embodiments which calculate the predistortion coefficients for each carrier can be modified so that the frequency, distortion etc on the other carriers are taken into consideration.

5 In the embodiments where the composite signal is predistorted, the combiner output consists of amplitude words, the correction occurring by adjusting the magnitude of the words. Nonlinearities in the amplifier output could be compensated by correcting the magnitude of the combiner output words with an inverse function.  
10 The correction may thus be dependent on the particular combiner output. This might occur by indexing a look-up table with the combiner output word and outputting the respective contents to the digital to analogue converter.

15 In the embodiments of the present invention described hereinbefore, only one set of intermediate frequencies is used. However in alternate embodiments of the present invention, there may be a further stage where the frequencies of the signals at a first set of intermediate frequencies may be upconverted to a  
20 second set of intermediate frequencies which are greater than the first set of intermediate frequencies but less than the radio frequency.

Whilst the embodiment of the present invention has been described  
25 in the context of the GSM standard it should be appreciated that embodiments of the present invention are applicable to any other TDMA system, any system using spread spectrum techniques such as code division multiple access (CDMA), frequency division multiple access (FDMA) or hybrids of any of these methods. For example GSM  
30 is an FDMA/TDMA hybrid.

It should be appreciated that although the preferred embodiment of the present invention has been described in the context of a base transceiver station, embodiments of the present invention  
35 are also applicable to mobile stations and terminals which are arranged to communicate with the base station. Embodiments of the present invention can be used with any suitable transmitter which is sending signals at more than one frequency at the same time in both wireless and wired environments.

## 5 CLAIMS:

1. A multi frequency carrier transmitter comprising:

input means for receiving a plurality of different digital signals to be transmitted, said different signals to be transmitted on different carrier frequencies;

amplifier means for receiving a composite signal comprising said different signals at the respective carrier frequencies and amplifying said composite signal; and

predistortion means for predistorting said plurality of digital signals prior to amplification of the composite signal by said amplification means, said predistortion provided by said predistortion means being subsequently altered in dependence on the difference between said input signals and the output at said amplifier means.

2. A transmitter as claimed in claim 1, wherein said input means are arranged to separately receive each of said different signals.

3. A transmitter as claimed in claim 1 or 2, wherein combiner means are provided between the input means and the amplifier means for combining said plurality of different signals to provide a composite signal.

4. A transmitter as claimed in any preceding claim, wherein the predistortion means are arranged to predistort individually each of the plurality of different signals.

5. A transmitter as claimed in claim 4, wherein said predistortion means predistorts said signals before the plurality of different signals are combined by said combiner.

6. A transmitter as claimed in claim 3, wherein the predistortion means is arranged to predistort the composite signal after the plurality of signals have been combined by the combiner.

5 7. A transmitter as claimed in any one of the preceding claims comprising a feedback path arranged between the amplifying means and the predistorting means.

10 8. A transmitter as claimed in claim 7, wherein the predistorting means is arranged to compare the output from the amplifying means from the feedback path with the signals received by the receiving means and to provide, if necessary, at least one new predistortion value to be applied to at least one subsequent signal received by said receiving means.

15 9. A transmitter as claimed in claim 7 or 8, wherein means are provided in said feedback path for separating the output of the amplifying means into the plurality of different signals.

20 10. A transmitter as claimed in claim 9, wherein the predistorting means is arranged to compare each of said separated signals with the corresponding signal received from said input means and to determine if the at least one predistortion value needs to be altered.

25 11. A transmitter as claimed in claim 7, wherein said predistorting means is arranged to compare the composite signal from the amplifying means with the plurality of different signals to provide, if necessary, the at least one new predistortion value.

30 12. A transmitter as claimed in any preceding claim, wherein said predistortion means are arranged to provide a plurality of predistortion coefficients, at least one predistortion coefficient being provided for each multicarrier frequency.

35 13. A transmitter as claimed in claim 12, wherein said predistortion coefficients for each multicarrier frequency takes into account characteristics of other of said multicarrier frequencies.

40

5 14. A transmitter as claimed in claim 13, wherein said characteristics comprise one or more of the following:  
frequency; and distortion.

10 15. A transmitter as claimed in any one of the preceding claims, wherein the amplifier means comprises a nonlinear amplifier.

16. A transmitter as claimed in claim 15, wherein said predistortion means is arranged to compensate for the nonlinearity of the phase and/or amplitude of the amplifier.

15 17. A transmitter as claimed in any one of the preceding claims, wherein digital to analogue convertor means are provided for converting said plurality of signals to analogue form before said signals are amplified by said amplifier means.

20 18. A transmitter as claimed in claim 8 or any claim appended thereto, wherein analogue to digital convertor means are provided for converting the output from the feedback path to digital format prior to the output of the feedback path being input to  
25 said predistorting means.

19. A transmitter as claimed in claim 9 or any claim appended thereto, wherein analogue to digital converter means are provided for converting the output of the feedback path to digital format  
30 prior to the separating means separating the output of the feedback path into a plurality of different signals.

20. A base station comprising a transmitter as claimed in any preceding claim.

35 21. A mobile station comprising a transmitter as claimed in any of claims 1 to 19.

40 21. A multi carrier frequency transmission method comprising the steps of:  
receiving a plurality of different digital signals to be

5 transmitted, said different signals to be transmitted on different carrier frequencies;

combining said plurality of different signals to provide a composite signal comprising the different signals at the respective carrier frequencies; and

10 amplifying said composite signal, wherein the method further comprises the steps of:

predistorting the plurality of different digital signals prior to amplification of the composite signal by the amplification means; and

15 altering the predistortion applied to subsequent signals in dependence on the difference between said different signals and the amplified signal.



5

ABSTRACT

## A TRANSMITTER AND A METHOD OF TRANSMITTING

10 A multi frequency carrier transmitter comprises input means for  
receiving a plurality of different digital signals to be  
transmitted. The different signals are to be transmitted on  
different carrier frequencies. Amplifier means receive a  
composite signal comprising the different signals at the  
15 respective carrier frequencies and amplify the composite signal.  
Predistortion means predistort the plurality of digital signals  
prior to amplification of the composite signal by the  
amplification means. The predistortion provided by the  
predistortion means is subsequently altered in dependence on the  
20 difference between the input signals and the output at the  
amplifier means.

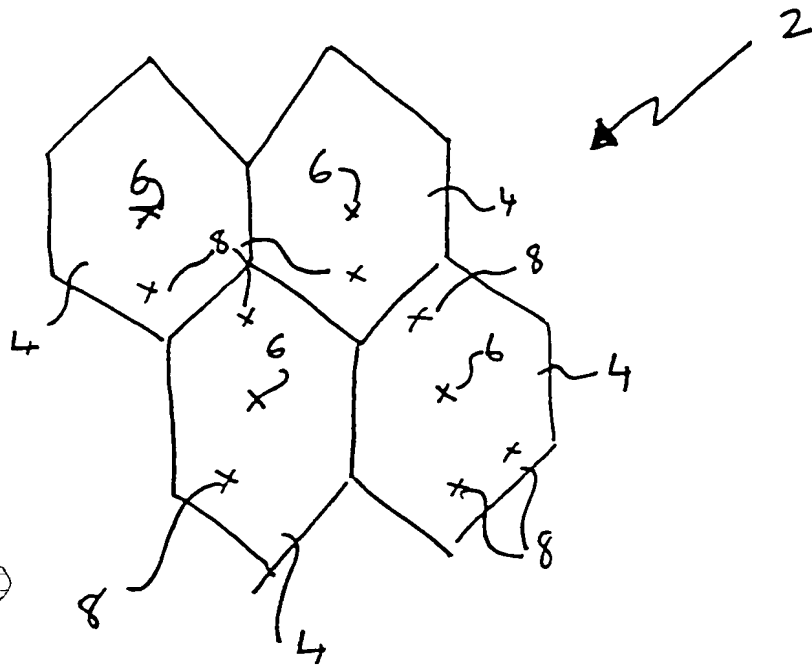



FIGURE 1

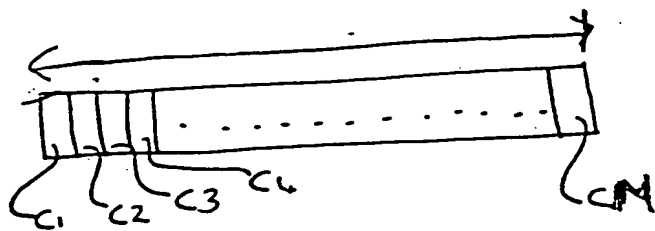


FIGURE 2a

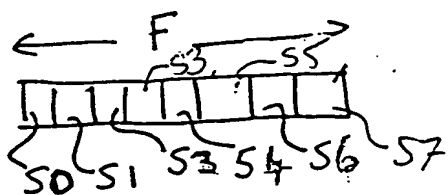


FIGURE 2b

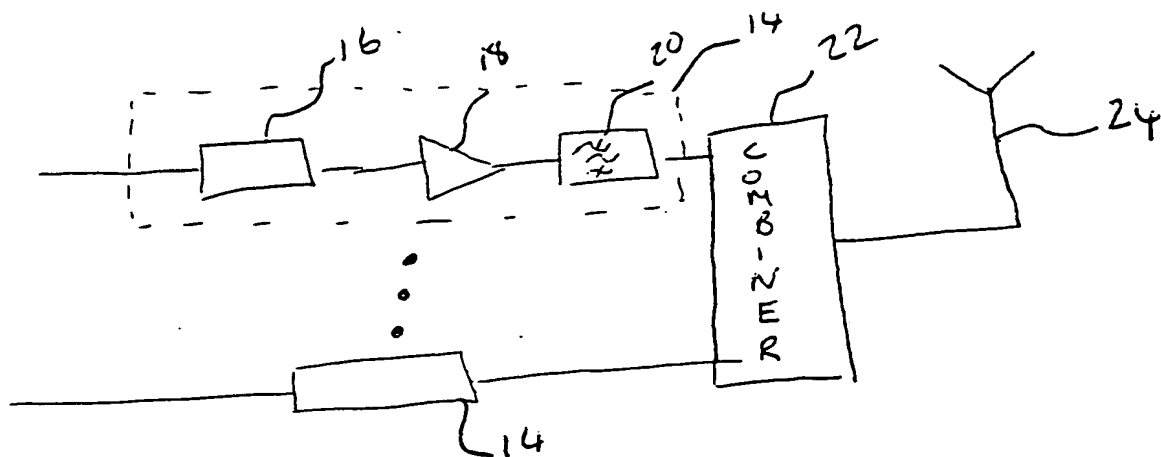
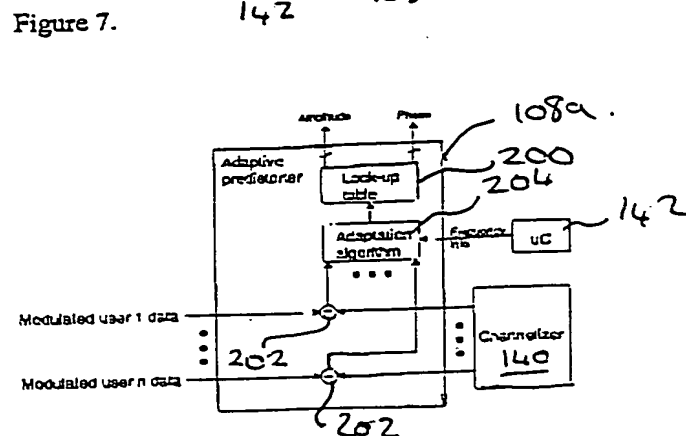
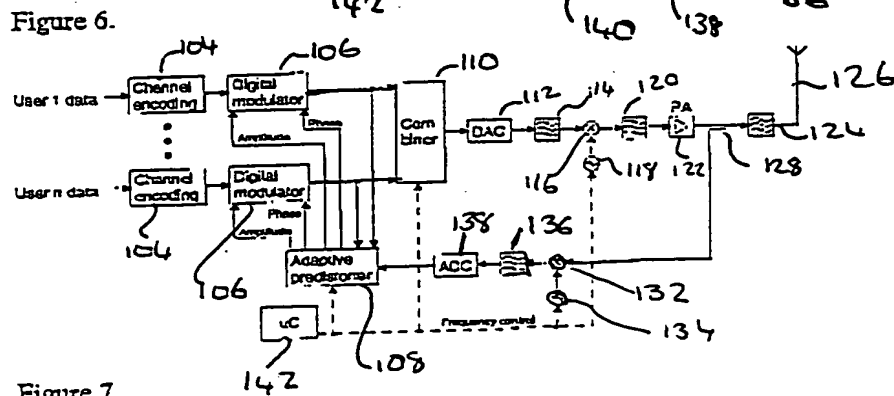
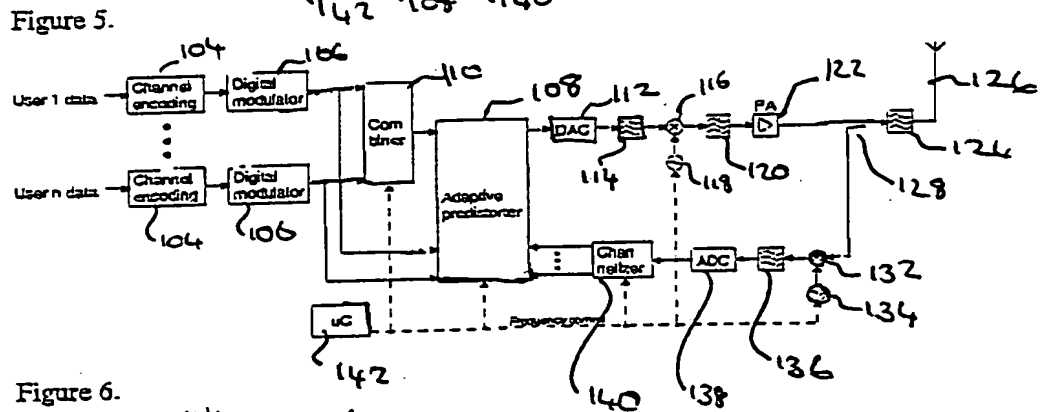
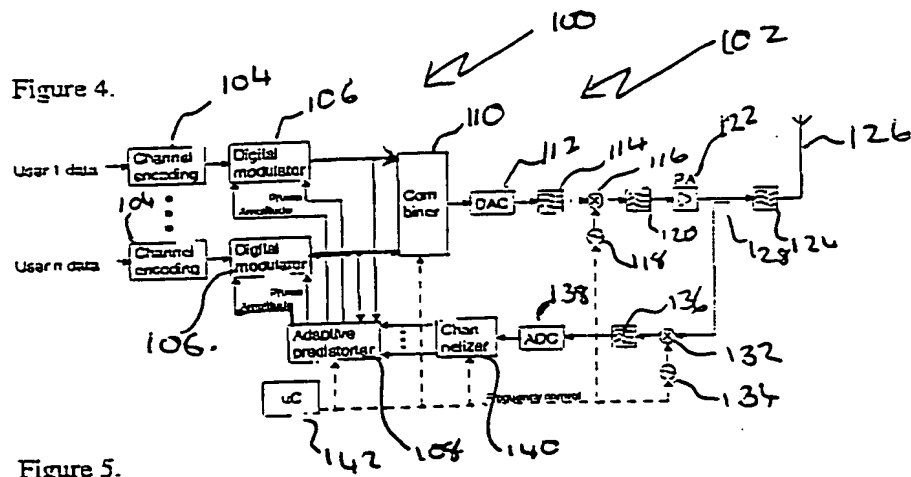


FIGURE 3



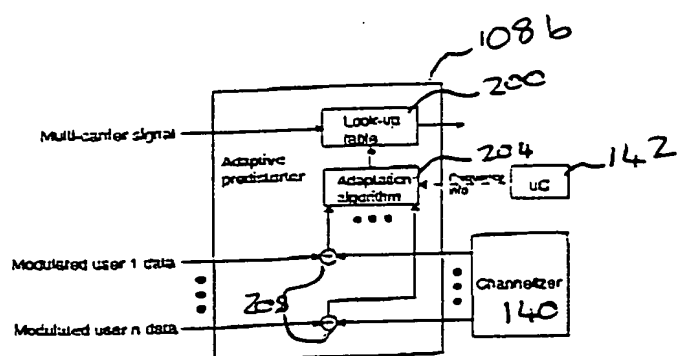


Figure 9.

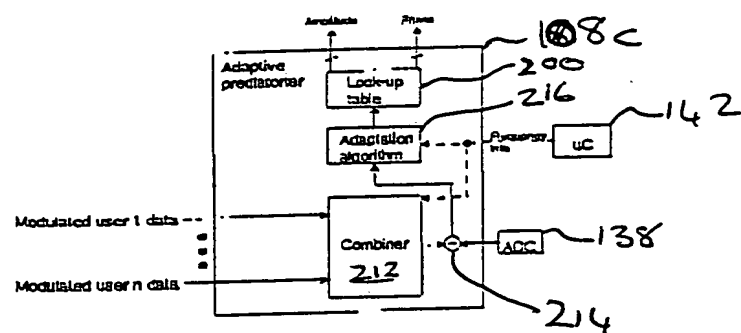


Figure 10.

